


# RAWP系列翘板开关



### 技术参数 SPECIFICATION:

安规认证 ( safety approval ) :UL, CUL, VDE, ENEC  
 电气规格 ( Electrical rating ) :10A 250VAC, 15A125VAC  
 机械寿命 ( Mechanical life endurance ) :30000 cycles  
 电器寿命 ( Electrical life endurance ) :10000 cycles  
 接触电阻 ( Contact resistance ) :<20mΩ  
 绝缘电阻 ( Insulation resistance ) :>1000MΩ  
 环境温度 ( Ambient temperature ) :>T85/T105  
 防火等级 ( Flammability ) :UL94 V-2. UL94 V-0.灼热丝, 针焰测试  
 外壳材料 ( Material of housing ) :PA66  
 触电材料 ( Contacts ) :银合金 ( Silver alloy )  
 端子材料 ( Terminal ) :铜镀镍 ( Copper silver plated )  
 端子焊性 ( Solder ability of terminal ) :Max 350°C 3S, 用手焊接时, 不可给端子施加压力

### 料号 Ordering Procedure

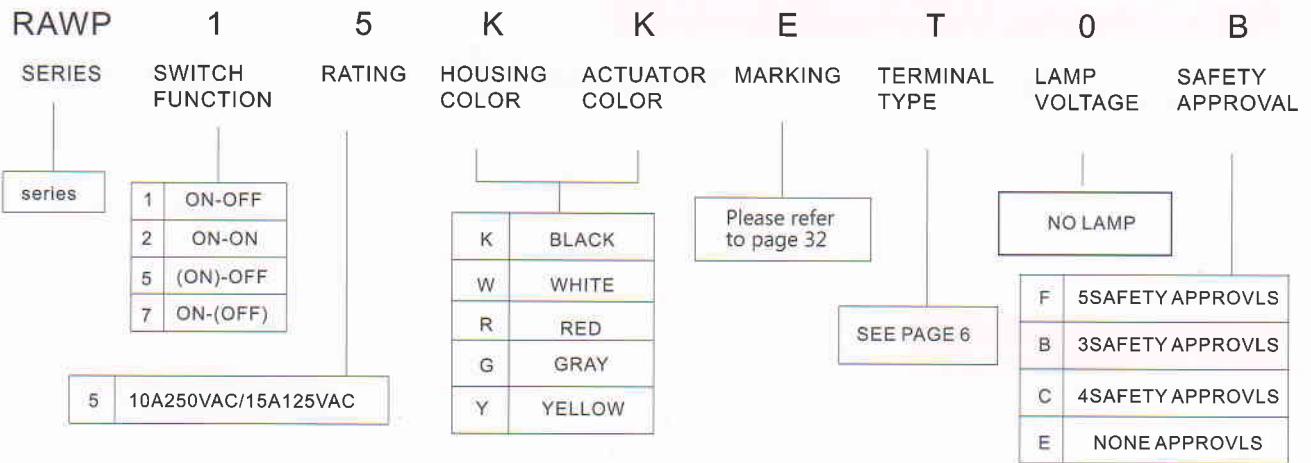


### 开关功能 Option Of Switch Function

Item NO	Poles\$ Throws	Rocker position():Monmentary		
		Left	Center	Right
RAWP1	SPST	ON	None	OFF
RAWP2	SPDT	ON	None	ON
RAWP5	SPST	(ON)	None	OFF
RAWP7	SPST	ON	None	(OFF)

### 外形尺寸 Dimension:



### 开孔尺寸 Panel Cut Out



Z	Y	X
0.7~1.25[0.28~0.49]	12.80~12.90[504~508]	19.20~19.30[756~760]
1.25~2.0[0.49~0.79]	12.80~12.90[504~508]	19.30~19.40[760~764]
2.0~3.0[0.79~0.118]	12.80~12.90[504~508]	19.50~19.60[768~772]



RAWP15KKFT0B



RAWP15WWET0B



RAWP15KKET0B